


* 24 V Launching March 2012

Easy to install. Easy to wire. Easy to program.

- **Robustness** for gate up to 500 kg in residential or commercial.
- **Self learning programming system:** Autoregulation of speed and torque in relation with the gate weight (24V version only).
- **Intuitive programming interface:** Direct view on a **large LCD screen** to facilitate parameters modification (24V version only).
- **Compatible with solar system:** No need for power supply (24V version only).
- **Backup battery pack** (option) in case of power failure (24V version only).
- **Mechanical declutching system** to open the gate with hand.

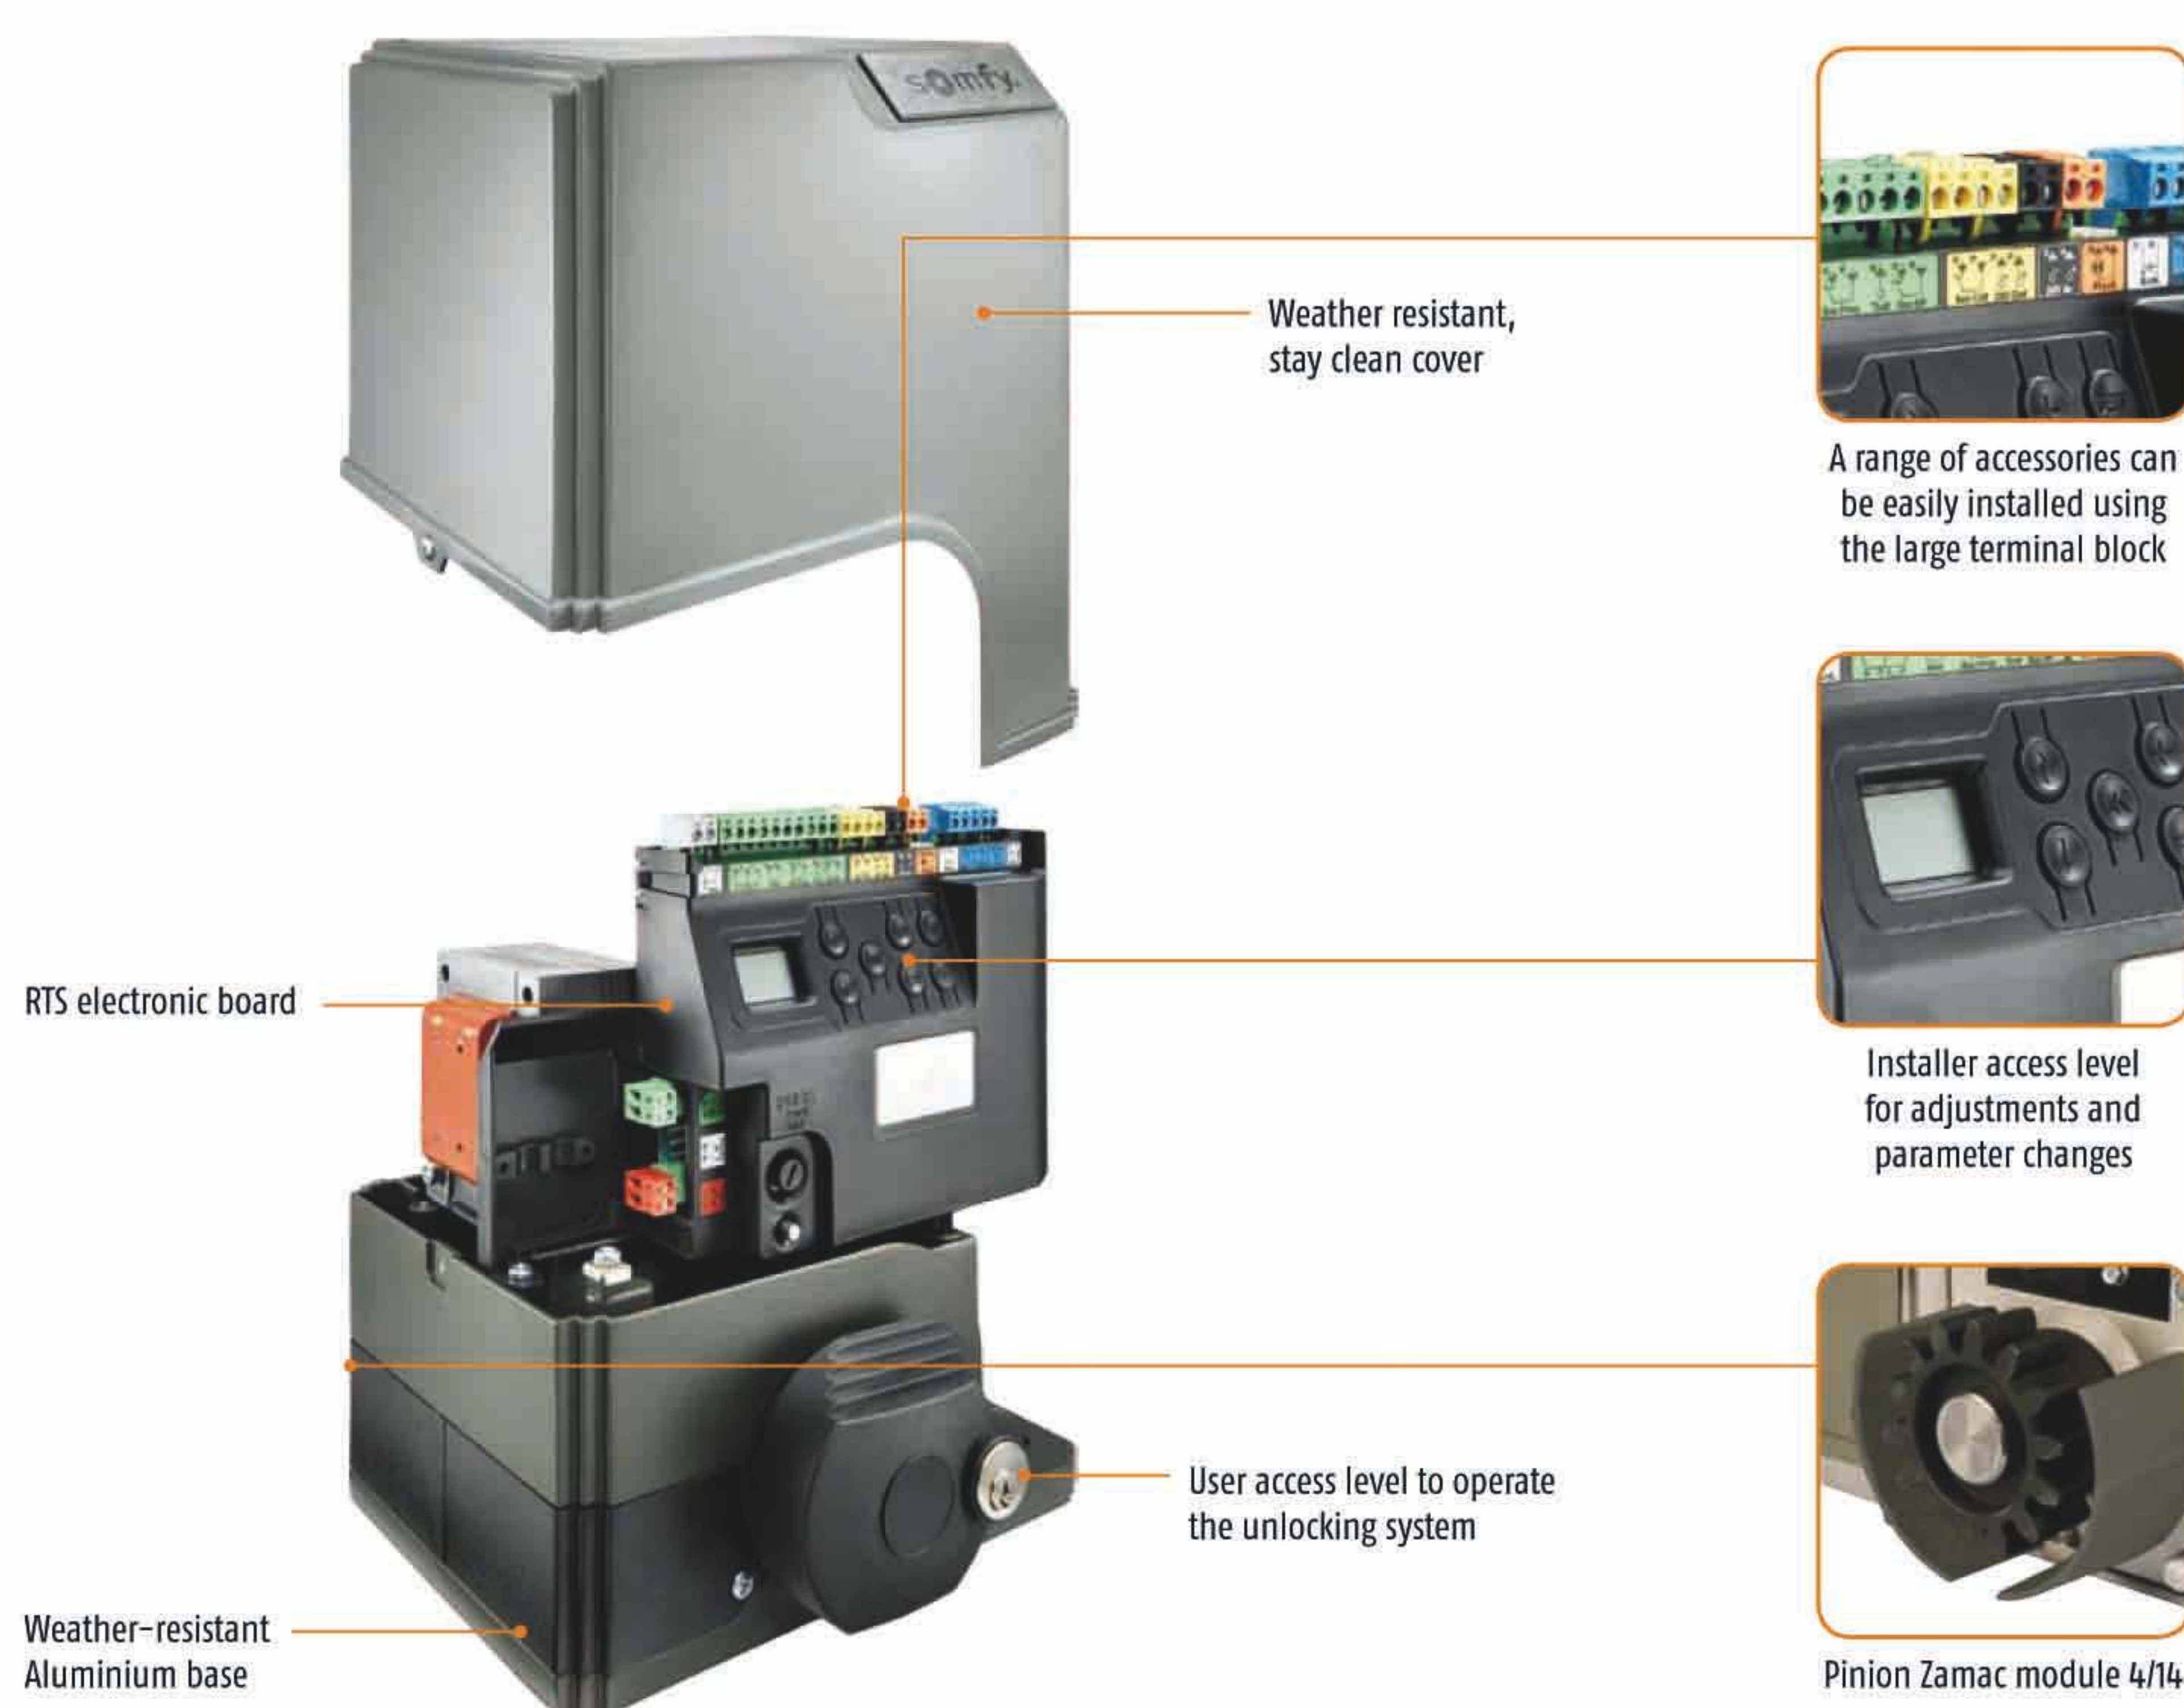

OPTIONAL ACCESSORIES



Radio Keypad Metal RTS
ref. 1841116



Backup battery
ref. 9014612




Wired Intercom
ref. 2400552




1 m of steel-reinforced nylon rack with
• Top fastening ref. 9011090
• Bottom fastening ref. 9011089

GENERAL OVERALL SIZE

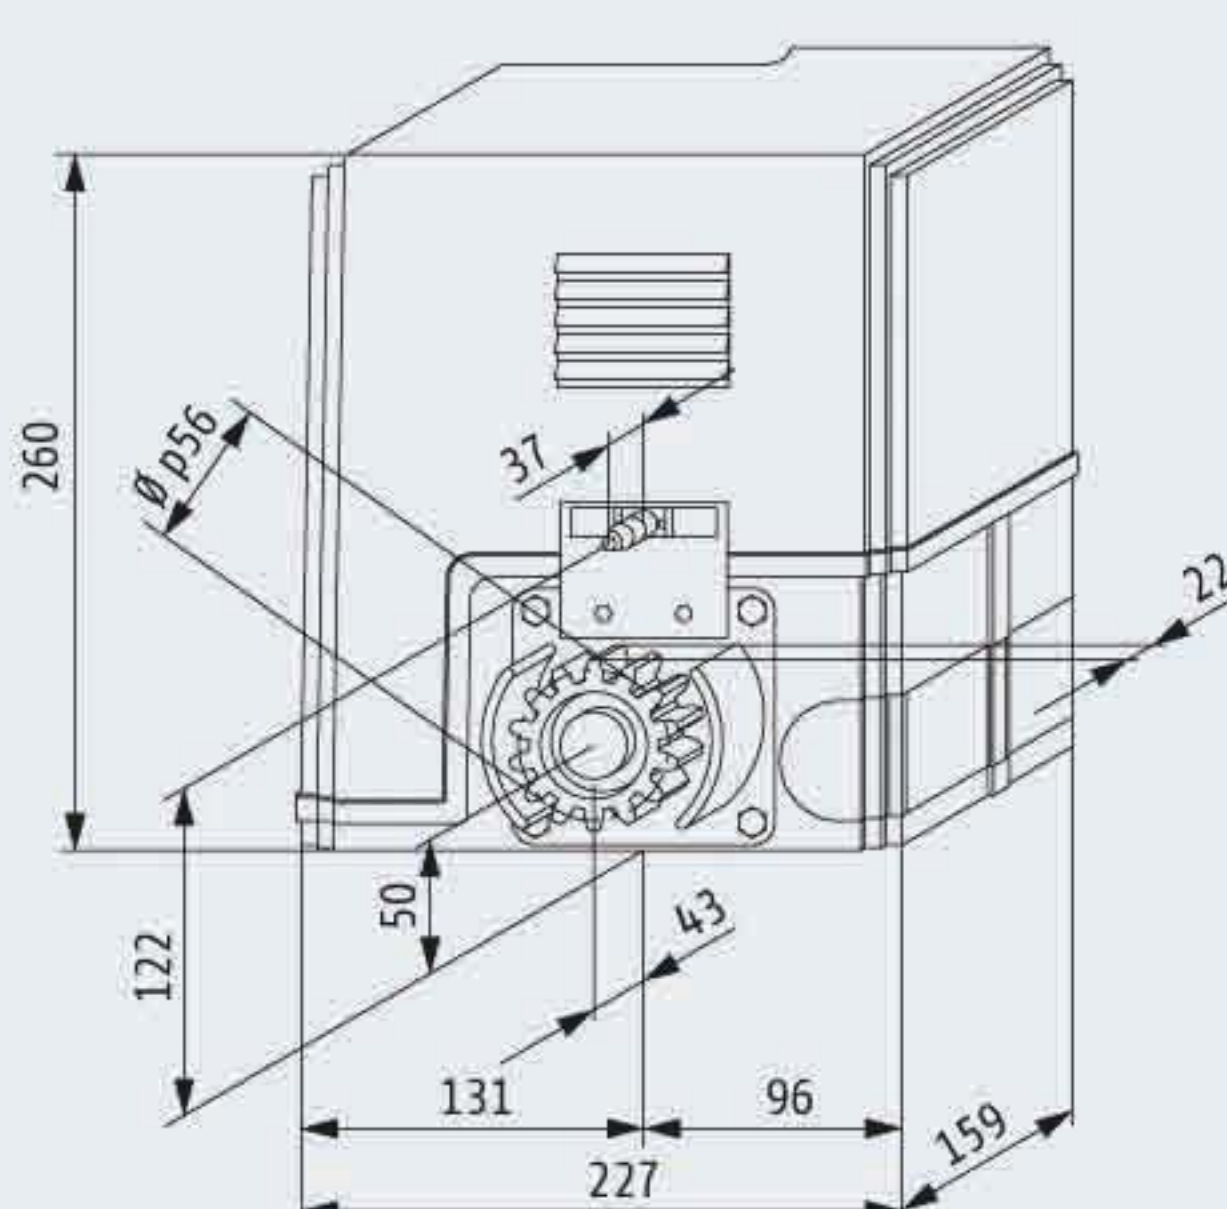

TYPE OF INSTALLATION

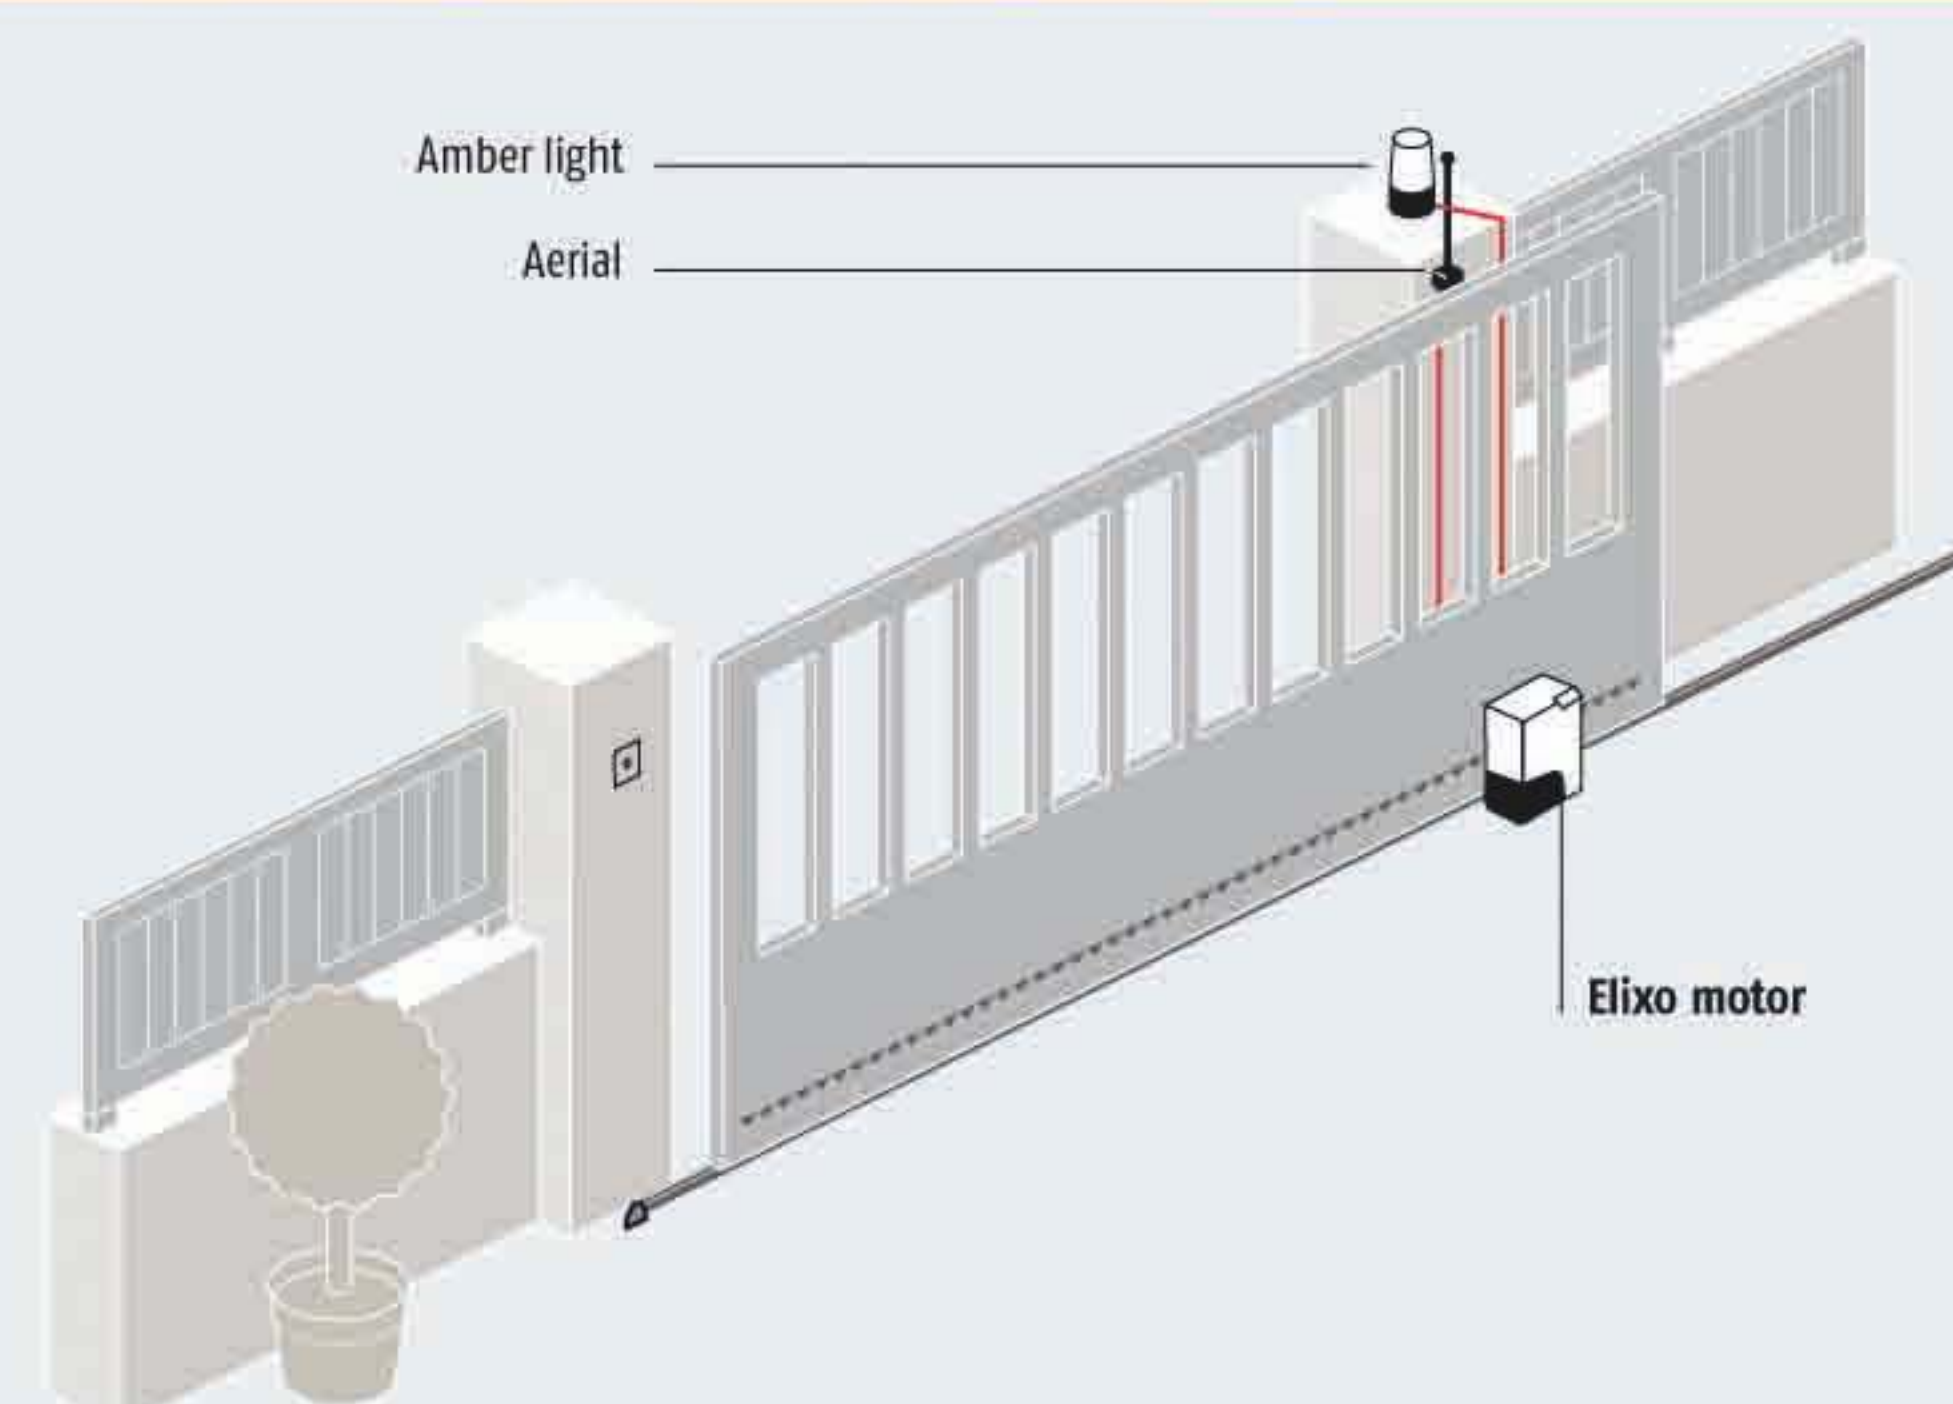

TECHNICAL CHARACTERISTICS

	24V ELIXO 500 KIT STANDARD 24 Vdc	230V ELIXO 500 KIT STANDARD 230 V
Motor power supply	24 Vdc	230 Vac - 50 Hz
Power consumption	70 W	290 W
Capacitor	NA	10 µF
Gear reduction ratio	1/44	1/30
Gate speed	12 m/min	8.5 m/min
Obstacle detection	Electronic torque limiter	Mechanical
Max. number of operations/day	30	100
Control electronics	Integrated with LCD display	Integrated with micro-switches
Operating temperature	-15°C to +60°C	
Protection factor	IP 44	
RTS remote control frequency	433.42 Mhz	
Number of remote controls that can be memorized	36	