



Ixengo L 24 V / 230 V

UP TO 4 M – 400 KG PER LEAF

* 24 V Launching March 2012




- **Robustness** for leaf up to 400 kg and 4 m in residential or commercial.
- **Self learning programming system:** Autoregulation of speed and torque in relation with the gate weight (24V version only).
- **Intuitive programming interface:** Direct view on a **large LCD screen** to facilitate parameters modification (24V version only).
- **Precise adjustment of leaf position:** Magnetic integrated end limit switch.
- **Backup battery pack** (option) in case of power failure (24V version only).
- **Mechanical declutching system** to open the gate with hand.



Mechanical external declutching system



Magnetic end limits (Ixengo L)

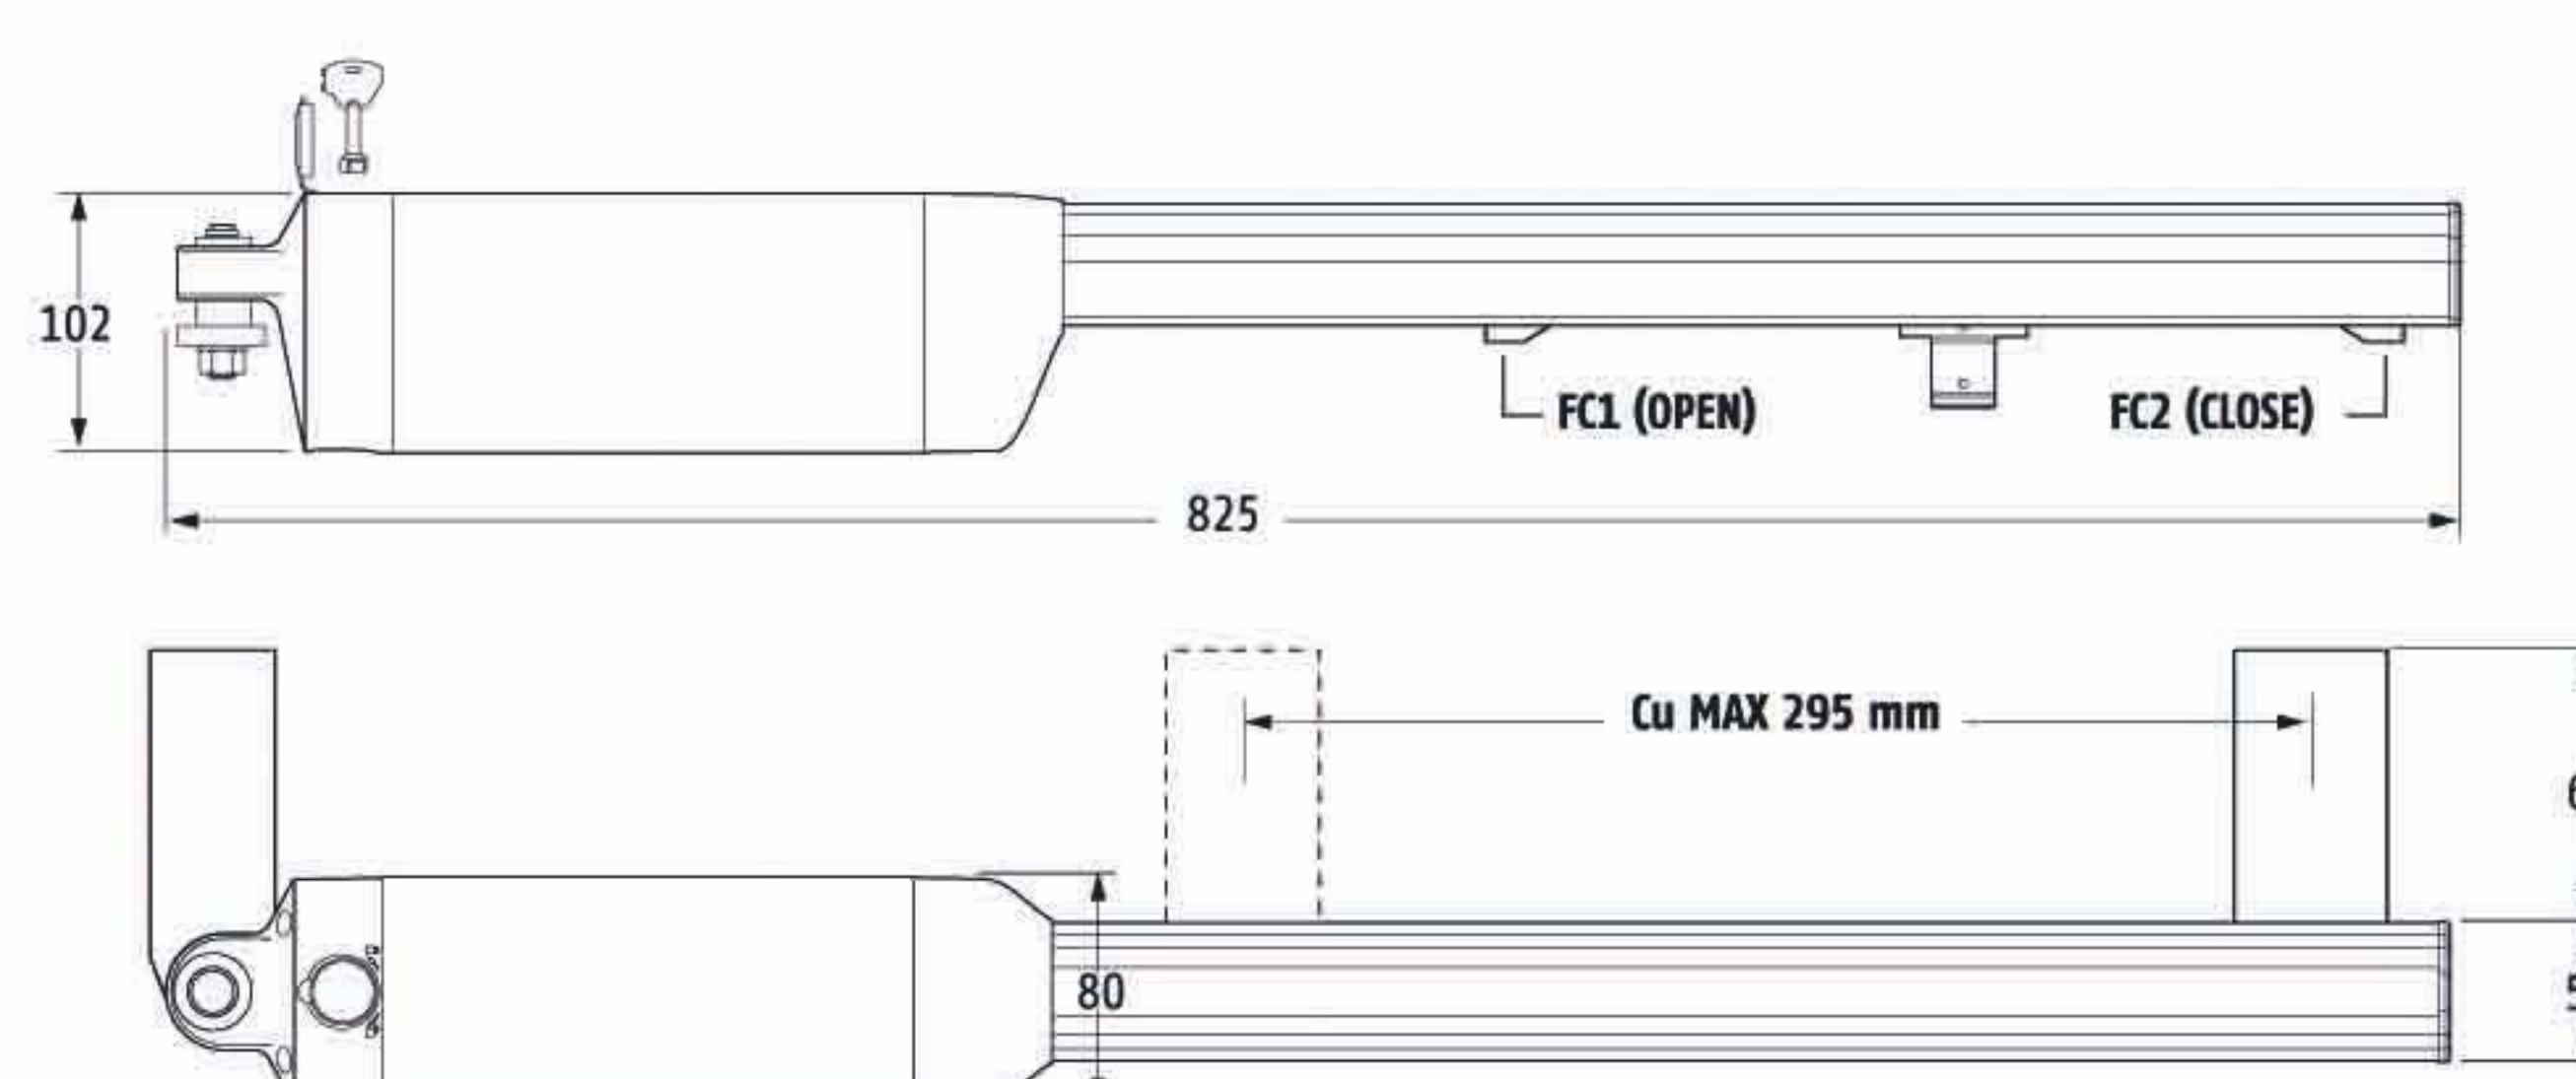

OPTIONAL ACCESSORIES S/L



Key switch
ref. 1841036



Electrical lock
ref. 9011073



Ground plate
ref. 9011074



Backup battery
ref. 9001001

3S CONTROL BOARD S/L



TECHNICAL CHARACTERISTICS	IXENGO L 24	IXENGO L 230
Motor power supply	24 Vdc	230 V \pm 10% 50 Hz
Power consumption	40 W	210 W
Capacitor	NA	6.3 μ F
Absorbed current	1.5 A	0.8 A
Push and pull force	2,000 N	
Working stroke	410 mm	
Stem speed	14 mm/s	12 mm/s
Max. number of operations/day	60	
Max. leaf length without electric lock	3,000 mm	
Max. leaf length with electric lock	4,000 mm	
Max. leaf weight	400 kg	
Operating temperature	-20°C to +60°C	
Protection factor	IP 44	
Number of remote controls that can be memorized	36	